



TOOLS, SPARES & CONTROLS

FOR HVAC&R INDUSTRY

ACREX[®]
India 2026

12-14 March
BEC, Mumbai

Booth No. G-46
Hall No.-4

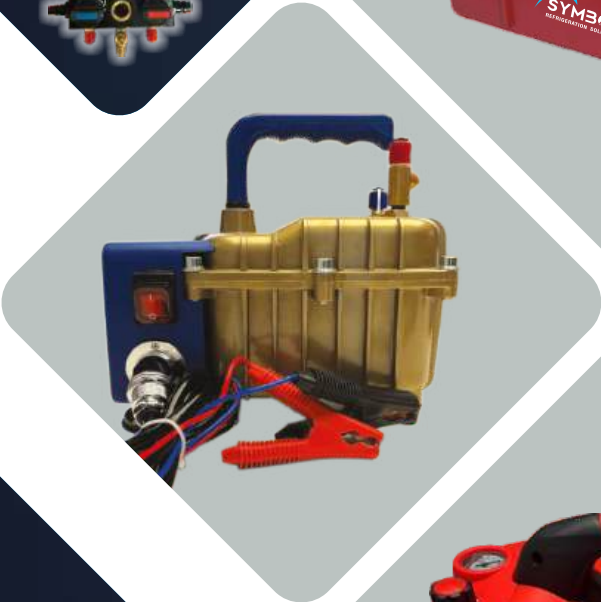

Scan For Catalog

2026

High Pressure Washer



(Aluminum Winding Motor)

SR-1800 8000/-



(Copper Winding Motor)

SR-2000 11000/-



(Aluminum Winding Motor)

SR-1800P 8500/-



(With Adjustable Pressure)

SR-1800AP 9500/-



(Copper Winding Carbon Brush Motor)

SR-1800CB 7000/-

Pressure Washer Spare Parts



Short Gun.

750/-



Wire Braided Hydraulic Hose

1050/-



Pump Head

1825/-

Vacuum & Pressure Pump (Copper Winding)



Copper Winding Vacuum Pump

MODEL	SR 115	SR 215	SR 225	SR 245	SR 2100 SG
Free Air Displacement	1.5 CFM	1.5 CFM	2.5 CFM	4.5 CFM	10 CFM
	42 L/min	42 L/min	70 L/min	128 L/min	283 L/min
Ultimate Vacuum	150 Micron	15 Micron	15 Micron	15 Micron	15 Micron
Motor Power	1/4 HP	1/4 HP	1/3HP	1/2 HP	1 HP
Intake Fitting	1/4 Flare	1/4 Flare	1/4 Flare	1/4 & 3/8 Flare	1/4 & 3/8 Flare
Oil Capacity	320 ml	180 ml	280 ml	350 ml	700 ml
Net Weight	5.3 Kg	6 Kg	7 Kg	11.8 Kg	16 Kg
M.R.P. ₹	8750.00	15000.00	18000.00	21000.00	34000.00



Refrigerant Recovery Unit-1HP (with Oil Separator)



R-32
REC-500-OSR32 93000/-

Model	RR500 ; RR500(R32)						
Refrigerants	Category III: R12,R134a,R401C,R406A,R500,(R32 model suit for R32,R1234YF) Category IV:R22 R401A R401B R402B R407C R407D R408A R409A R411A R411B R412A R502 R509 Category V :R402A R404A R407A R407B R410A R507						
Power	220-240VAC 50~60HZ ; 110-120Vac 60Hz						
Motor	1HP,Twin Cylinder System						
Motor Speed	1450rpm@50Hz;1750rpm@60Hz						
Maximal Current Draw	110V:10A;220V:5A						
Compressor	Oil-less,Air-cooled,Piston						
High Pressure Shut-off	38.5bar/3850kPa(558psi)						
		Category III	Category IV	Category V	Category III	Category IV	Category V
Recovery Rate(Kg/min)	Vapor	0.20	0.25	0.25	0.40	0.50	0.50
	Liquid	1.60	1.80	2.20	3.00	3.50	3.50
	Push/Pull	4.60	5.60	6.30	7.50	8.50	9.50
Operating Temperature	0°C ~40°C/32~104°F						
Dimensions	400X250X360mm						
Net Weight	14.5kg						

Condensate Drain Pump

- ★ Overflow Alarm Function
- ★ Anti-Mold Tank
- ★ Tank Automatically Clean After Continuous Shutdown For Seven Days
- ★ Suitable water temperature - 0~70 C



Current - 3A
 Power - 5W
 Max. Lift - 50Ft. /15 Mts.
 Tank Capacity - 40ml
 Max. Flow 20L/Hours

Suitable for Ducted units, Floor Standing & Chassis unit, High Wall split systems

SR-MPR50 5500/-



Current - 3A
 Power - 5W
 Max. Lift - 60Ft./20 Mts.
 Tank Capacity - 300ml
 Max. Flow 20L/Hours

- ★ Overflow Alarm Function
- ★ Anti-Mold Tank
- ★ Tank Automatically Clean After Continuous Shutdown For Seven Days
- ★ Suitable water temperature - 0~70 C

Suitable for wall-mounted split unit-Fan-coil unit, Dehumidifiers

SR-WPD66 5250/-

- ★ Overflow Alarm Function
- ★ Anti-Mold Tank
- ★ Tank Automatically Clean After Continuous Shutdown For Seven Days
- ★ Suitable water temperature - 0~70 C



Current - 3A
 Power - 5W
 Max. Lift - 50Ft. /15 Mts.
 Tank Capacity - 40ml
 Max. Flow 20L/Hours

Suitable for Ducted units, Floor Standing & Chassis unit, High Wall split systems

SR-MPM50 4500/-

- ★ Equipped With Overflow Detection Switch
- ★ Automatic Start And Stop Operation
- ★ Thermally Protected, Fan-Cooled Motor

Current - 0.65A
 Power - 70W
 Max. Lift - 16Ft./5 Mts.
 Tank Capacity - 2.3 Ltr.
 Max. Flow 300L/Hours



Suitable for Ducted type unit, Floor Mounted Unit, Chassis Type Unit, Air Handling Units, Refrigerated Unit & Dehumidifier.

SR-TPF22 7800/-



SR-XPA Ceiling -Mounted Drainage Pump

Current - 0.07A
 Power - 10.8W
 Max. Lift - 5 Ft
 Max. Flow - 24L/Hours

SR-XPA-7A 1550/-

Filter Drier



MODEL NO. (Flare Type)	MODEL NO. (Solder Type)	MRP ₹	CONNECTION SIZE
SEK-032	SEK-032S	300.00	1/4
SEK-033	SEK-033S	350.00	3/8
SEK-053	SEK-053S	530.00	3/8
SEK-083	SEK-083S	550.00	3/8
SEK-163	SEK-163S	600.00	3/8
SEK-164	SEK-164S	625.00	1/2
SEK-165	SEK-165S	650.00	5/8
SEK-304		1000.00	1/2
SEK-305		1150.00	5/8
	SEK-307S	1400.00	7/8
CORE DS-48		1100.00	

Oil Separator (Sealed Type)

MODEL NO.	MRP ₹	CONNECTION SIZE ODF (INCHES)	VALVE BODY (INCHES)	SIZE REFRIGERATION CAPACITY (TON)		
				R 22 / R 407C	R 502	R 134A
SPLY - 55824	4400.00	1/2	10.75	2	2	1.75
SPLY - 55855	4500.00	5/8	14.25	5.5	5.75	4.5
SPLY - 55877	4600.00	7/8	17.75	8	8.5	6.5
SPLY - 55889	5150.00	1-1/8	21.00	11	11.5	8.5
SPLY - 559011	6100.00	1-3/8	21.25	14	14.5	11.33



Oil Separator (Flange Type)



MODEL NO.	MRP ₹	CONNECTION SIZE ODF (INCHES)	VALVE BODY (INCHES)	SIZE REFRIGERATION CAPACITY (TON)		
				R 22 / R 407C	R 502	R 134A
SPLY - 5302	5250.00	1/2	10.75	2	2	1.75
SPLY - 5303	5575.00	5/8	14.25	5.5	5.75	4.5
SPLY - 5304	6000.00	7/8	17.75	8	8.5	6.5
SPLY - 5305	6300.00	1-1/8	21.00	11	11.5	8.5
SPLY - 5306	7350.00	1-3/8	21.25	14	14.5	11.33
SPLY - 5307	9000.00	1-5/8	22.00	18	17.5	13.25

Liquid Accumulator

MODEL NO.	MRP ₹	CONNECTION SIZE ODF (INCHES)	VALVE BODY (INCHES)	SIZE REFRIGERATION CAPACITY (TON)		
				R-22	R-134A	R 404A
SPLQ - 204	2400.00	1/2	8.73	3.3	3.3	3.4
SPLQ - 205	2675.00	5/8	11.10	4	4	4.2
SPLQ - 207	3350.00	7/8	12.68	9	9	9.3
SPLQ - 208	4200.00	1-1/8	15.71	13.3	13.3	13.7
SPLQ - 209	5050.00	1-3/8	20.70	20.5	20.5	21.2



Single Gauge Manifold

(For R-22/R-134A/R-404/R-407)



SR-466 625/-



SR-468 975/-



SR-468-R410A 1100/-

(For R-22/R-134A/R-410A/R-32)



SR-475BV 2000/-



SR-473 1350/-



Digital Gauge

SR-250DG ₹ 4500/-
SR-500DG ₹ 4500/-

Refrigerant Gauges



Pressure Gauge

SR-250 R-22 ₹ 425/-
SR-500 R-22 ₹ 425/-



Pressure Gauge

SR-500 R-410 ₹ 525/-
SR-800 R-410 ₹ 525/-



Panel Gauge
(Back Connection)

SR-250-FRG ₹ 600/-
SR-500-FRG ₹ 600/-



Oil Filled SS Gauge
(Back Connection)

OPG-250 R-22 ₹ 900/-
OPG-500 R-22 ₹ 900/-



Oil Filled SS Gauge
(Bottom Connection)

OPG-250BT R-22 ₹ 1000/-
OPG-500BT R-22 ₹ 1000/-
OPG-500BT R-410 ₹ 1200/-
OPG-800BT R-410 ₹ 1200/-



Oil Filled SS Gauge
(Back Connection)

OPG-500 R-410 ₹ 1100/-
OPG-800 R-410 ₹ 1100/-

Double Gauge Manifold

(For R-22/R-134A/R-404/R-407)



SR-536A 2000/-



(with 60" charging hose)
SR-560B 4200/-



SR-560C-R134A 7500/-

(For R-22/R-134A/R-410A/R-32)



(With 800-4000psi Charging Hose)
SR-536H 3000/-



(With 800-4000psi Charging Hose)
SR-536D-R410A 4200/-



(With 800-4000psi Charging Hose)
SR-536E-R410A 6300/-

Charging Hose



Charging Hose (500-2500psi)		
MODEL NO.	SIZE	MRP ₹
SR 12236 R	3 Ft.	600/-
SR 12260 R	5 Ft.	900/-

Charging Hose (600-3000psi)		
MODEL NO.	SIZE	MRP ₹
SR 12236 P	3 Ft.	1500/-
SR 12260 P	5 Ft.	2000/-
SR 12272 P	6 Ft.	2200/-
SR 122108 P	9 Ft.	3250/-

Charging Hose (800-4000psi) For R410A		
MODEL NO.	SIZE	MRP ₹
SR 41036 P	3 Ft.	1750/-
SR 41060 P	5 Ft.	2750/-

Charging Hose with ball valve (600-3000psi)		
MODEL NO.	SIZE	MRP ₹
SR 122236BV	3 Ft.	3000/-

Car AC Quick Coupler



Quick Coupler
SR-QC-MH 900/-
SR-QC-ML 900/-



Quick Coupler (Lock Type)
SR-QCLT-MH 1100/-
SR-QCLT-ML 1100/-



Coupler For R1234yf.
SR-QCMH-R1234YF 1600/-
SR-QCML-R1234YF 1600/-



Quick Coupler
(pair of high & low coupler)
SR-12B 750/-

Service Tools



3-in-1 Tube Bender
1/4" 5/16" & 3/8"
SR-369 800/-



Tube Bender
SR-364-08 2000/-
SR-364-10 3000/-
SR-364-12 3600/-



Spring Bender
SR-102-04 135/-
SR-102-08 250/-
SR-102-10 315/-



Inner Tube Bender
1/4", 3/8", 1/2", & 5/8"
SR-205 2000/-



Pinch Off Plier
SR-201 525/-



Pinch Off Plier
SR-204 525/-



Capillary Cutter
Up To 3.0mm
SR-1104 375/-



Swaging Punch
1/4, 5/16 3/8 1/2" & 5/8" O.D
SR-95 410/-



Ratchet Wrench
3/16" & 5/16" Square Ratchet
SR-122 425/-



Fincomb
SR-351 350/-



Fincomb
SR-352 350/-



Deburrer
SR-210 350/-



Reamer
SR-208 325/-



Tube Expander
SR-622 1575/-



Valve Core Remover
SR-CRV01 1500/-

Flaring Tool



For 3/16", 1/4", 5/16, 3/8", 7/16", 1/2" & 5/8" O.D.
SR-195 1000/-



For 5/8", 3/4", 7/8", & 1-1/8" O.D.
SR-203 2000/-



For 3/16"-5/8" (5mm-16mm) O.D. Tubing
SR-525 1650/-



For 3/16"-3/4" (5mm-19mm) O.D. Tubing
SR-526 2300/-




45° Eccentric Cone Type Flaring Tools
For 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" (6mm-19mm O.D.)
SR-806A 2700/-



45° Eccentric Cone Type Flaring Tools
For 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" (6mm-19mm O.D.)
SR-8099 4250/-

Tube Cutter



Mini Tube Cutter with Zinc Alloy Body
For 1/8"-5/8" (3-16mm) O.D. Tubing
SR-127 265/-



Mini Tube Cutter with Zinc Alloy Body
For 1/8"-7/8" O.D. (3 mm-22 mm) O.D. Tubing
SR-128 300/-



Mini Tube Cutter with Aluminum Body
For 1/8"~1-1/8" (3-28mm) O.D. Tubing
SR-174 450/-



Tube Cutter with Aluminum Alloy Body
For 1/8"~1-1/8" (4-28mm) O.D. Tubing
SR-274 650/-



Tube Cutter with Aluminum Alloy Body
For 1/8"~1-3/8" (3-35mm) O.D. Tubing
SR-105 650/-



Tube Cutter with Aluminum Alloy Body
For 1/8"~1-1/4" (4-32mm) O.D. Tubing
SR-32 1600/-



Tube Cutter with Aluminum Alloy Body
For 1/4"~2-5/8" (6-70mm) O.D. Tubing
SR-670 3400/-



Tube Cutter Blade

SR-127B 50/-
SR-274B 50/-

Tool Kit



Flaring Tool Kit
Includes Flaring & Swaging Tool

SR-275 2300/-



Premium Flaring Tool Kit
Includes Tube Cutter, Ratchet,
Flaring & Swaging Tool

SR-278 3400/-



Eccentric Cone Type Flaring Tool Kit
Includes Tube Cutter, Reamer

For 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D.
6mm, 8mm, 10mm, 12mm, 16mm & 19mm O.D

SR-808F 4000/-



Manual Tube Expander Kit
3/8"-1 5/8" O. D. Includes Tube Cutter & Reamer

SR-200 19000/-



Hydraulic Tube Expander Kit
3/8"-1 5/8" O. D. Includes Tube Cutter & Reamer

SR-300L 29000/-



7 in 1 Tube Bender Kit
1/4, 5/16" 3/8" 1/2" 5/8" 3/4" & 7/8" O.D.
Includes Tube Cutter SR-32 & Deburrer

SR-999 16500/-



Service Kit
SR-8030 6250/-


1. Tube Bender 3 in 1-369
2. Flaring Tool - Upto 3/4
3. Pinch off Pliers 201
4. Ratchet Wrench 122
5. Tube Cutter 105
6. Tube Cutter 128
7. Swaging Punch
8. Reamer
9. Plier



Service Kit
SR-8032 12500/-

1. Flaring Tool 806A
2. Flaring Tool 195
3. Tube bender 3 in 1
4. Tube Cutter 105 (up to 1-3/8)
5. Tube Cutter 128
6. Pinch off Plier 201
7. Spring Bender 1/2
8. Spring Bender 5/8
9. Capillary Cutter 1104
10. Ratchet Wrench 122-123
11. Ratchet Wrench (1/4 & 9/16)
12. Swaging Tool
13. Plier
14. Screwdriver (4 mouth)
15. Wrench (Panna) 8"
16. Reamer

Self Ignition Hand Torch For Mapp & Propane Gas



- Brass tip to withstand high temp and dropping
- Specially designed valve to adust pressure precisely
- Thruster to speed up the gas flow and complete mixture for high temperature
- High quality igniter to gurantee successful ignition every time
- Accurate orifice size to make sure every torch has the same flame
- Tip spins 360° for various jobs




Steel made thruster 5-blade



SR-HT100 2500/- 360°



SR-HT200 3500/-



Steel made thruster 5-blade

- Stainless steel tip to withstand high temp and dropping
- Specially designed valve to adust pressure precisely
- Thruster to speed up the gas flow and complete mixture for high temperature
- Accurate orifice size to make sure every torch has the same flame
- Hose with high working pressure for reliability and durability

Burner Heating Torch (360 Swivel Brass Cartridge)



Hand Flame Torch (With 360° Rotation)
SRHT-8920 950/-

Brazing Torch



With Brass Nozzle (Single Barrel)

SRHT-S200 400/-



(With Brass Nozzle) (Double Barrel)

SRHT-D200 800/-



(Single Barrel)

SRHT-S200A 275/-



(Double Barrel)

SRHT-D200A 700/-

Cold Room Hardware



Cold Room Door Handle
SR-1178L 4600/-




Cold Room Door Hinges
SR-1460H 2200/-



Cold Room Door Latch
SR-2200L 2200/-

Axial Fan




Single Phase Axial Fan (Suction)							
MODEL No.	MRP ₹	Voltage (V)	Current (Amp)	Input (W)	Speed (rpm)	Airflow M3/h	Noise dB(A)
YWF4E-200S 8"	4125.00	220	0.12	27	1400	425	43
YWF4E-250S 10"	4300.00	220	0.25	50	1400	1108	55
YWF4E-300S 12"	4825.00	220	0.40	86	1350	1716	58
YWF4E-350S 14"	6450.00	220	0.60	135	1370	2666	62
YWF4E-400S 16"	7500.00	220	0.75	165	1360	3861	68
YWF4E-450S 18"	9000.00	220	1.00	215	1360	5000	68
YWF4E-500S 20"	11450.00	220	1.60	240	1320	6420	72
YWF4E-550S 22"	12750.00	220	2.20	460	1360	8240	75

Three Phase Axial Fan (Suction)							
MODEL No.	MRP ₹	Voltage (V)	Current (Amp)	Input (W)	Speed (rpm)	Airflow M3/h	Noise dB(A)
YWF4E-350S 14"	6450.00	380	0.35	135	1380	2688	62
YWF4D-400S 16"	7500.00	380	0.48	166	1380	4008	68
YWF4D-450S 18"	9000.00	380	0.65	230	1390	5180	68
YWF4D-500S 20"	11450.00	380	0.85	350	1350	6568	72
YWF4D-550S 22"	12750.00	380	0.98	430	1330	8716	75
YWF4D-600S 24"	17000.00	380	1.20	620	1350	11540	78



Single Phase Axial Fan (Blow)							
MODEL No.	MRP ₹	Voltage (V)	Current (Amp)	Input (W)	Speed (rpm)	Airflow M3/h	Noise dB(A)
YWF4E-250B 10"	4300.00	220	0.25	50	1400	1108	55
YWF4E-300B 12"	4825.00	220	0.42	85	1350	1716	58
YWF4E-350B 14"	6450.00	220	0.68	140	1350	2666	62
YWF4E-400B 16"	7500.00	220	0.85	180	1360	3861	68
YWF4E-450B 18"	9000.00	220	1.10	230	1360	5000	68

High Speed Axial Fan (Suction)							
MODEL No.	MRP ₹	Voltage (V)	Current (Amp)	Input (W)	Speed (rpm)	Airflow M3/h	Noise dB (A)
YWF2E-250S 10"	4500.00	220	0.48	100	2550	1358	60
YWF2E-300S 12"	5000.00	220	0.55	125	2400	2000	60



Axial Cooling Fan (Copper Winding)



Model No.	Size	MRP ₹	Current (Amp)	Power (watt)	Speed (rpm)	Airflow (Cfm)	Noise dB(A)
FM12038 A2HSL	(4"Square)	625	0.14	26	2700	90	40
FM15050 A2HSL	(6"Square)	1350	0.23	37	2700	190	52
FM17250 A2HSL	(6"Ovel)	1350	0.23	37	2500	150	52
FM17251 A2HSL	(6"Round)	1350	0.23	37	2400	150	52
FM17051 A2HSL	(6"Round+Square)	1350	0.23	65	2400	150	52
Fm20060 A2HBL	(8"Square)	2600	0.38	65	2400	420	64
FM20060 A2HBL	(8"Round+Square)	2600	0.38	56	2100	170	64
120X120X38mm AL	(4"Square)	475	0.14	26	2700	90	40
150x150x50mm AL	(6"Square)	1050	0.23	37	2700	190	52

Shaded Pole Motor

MODEL NO.	MRP ₹	Current (Amp)	POWER (W)		Speed (RPM)	
			Input	Output		
YZF5-13-18	925.00	0.20	29	5	1300	CCA
YZF10-20-18	1175.00	0.25	36	10	1300	CCA
YZF16-25-18	1700.00	0.45	60	16	1300	CCA
YZF25-40-18	2800.00	0.70	90	25	1300	Copper
YZF34-45-18	3300.00	0.85	110	34	1300	Copper



EC Q Fan



MODEL NO.	MRP ₹	Voltage (V)	POWER (W)		Speed (RPM)	Air Volume (CFM)
			Input	Output		
EC Q Fan (5W)	875.00	85-265V	7	5	1350	210
EC Q Fan (10W)	1125.00	85-265V	10	8	1550	230

Air Conditioner AC Motor

Voltage - AC 230V
 Power - 54W
 Speed - 900RPM
 Current - 0.50A
 Rotation - CW
 ←



SR-YDK54-6-CW 1800/-

Voltage - AC 230V
 Power - 54W
 Speed - 900RPM
 Current - 0.50A
 Rotation - CCW
 →



SR-YDK54-6-CCW 1800/-

Voltage - AC 230-240V
 Power - 32W
 Speed - 900RPM
 Current - 0.35A
 Rotation - CW
 ←



SR-YDK32-6-CW 1800/-

Air Conditioner DC Motor

Voltage - DC 310V
 Power - 45W
 Speed - 900RPM
 Current - 0.22A
 Rotation - CCW
 →



DC Outdoor Motor
SR-ZEFP-45-8-113L 3000/-

Voltage - DC 310V
 Power - 31W
 Speed - 1400RPM
 Current - 0.15A
 Rotation - CCW
 →



SR-WZDK30-38G 2150/-

Voltage - DC 310V
 Power - 32W
 Speed - 1400RPM
 Current - 0.13A
 Rotation - CCW
 →



SR-BLRA-1105 2150/-

Voltage - DC 310V
 Power - 31W
 Speed - 1300RPM
 Current - 0.13A
 Rotation - CCW
 →



SR-RD-310-30-8T 2150/-

Voltage - DC 310V
 Power - 30W
 Speed - 1400RPM
 Current - 0.14A
 Rotation - CCW
 →



SR-RD-310-30-8D-2 2150/-

Voltage - DC 340V
 Power - 18W
 Speed - 1150RPM
 Current - 0.08A
 Rotation - CCW
 →



SR-BLRA-11029T 2150/-

Voltage - DC 310V
 Power - 30W
 Speed - 1350RPM
 Current - 0.19A
 Rotation - CCW
 →



SR-WZD-40D 2150/-

Voltage - DC 340V
 Power - 30W
 Speed - 1300RPM
 Current - 0.10A
 Rotation - CCW
 →



SR-SIC-41CYJ-F418-1A 2150/-

Refrigerator DC Motor



SR-SS3W-SS-DC
SS-3 Wire
Short Shaft CW
1200/-



SR-SS3WNM-DC
SS-3 Wire
New Model CCW
1325/-



SR-SS3W-LS-DC
SS-3 Wire
Long Shaft CCW
1250/-



SR-GL4W-DC
GL-4 Wire CCW
1250/-



SR-GD2W-DC
GD-2 Wire CCW
1350/-



SR-WP3W-DC
WP-3 Wire CCW
1350/-



SR-BOS3W-9VDC
BOS-3 Wire 9V CCW
1400/-



SR-SS3W-FW
SS-3 Wire Fan (White)
125mm Diameter
825/-



SR-SS3W-FB
SS-3 Wire Fan (Black)
92mm Diameter
825/-

Refrigerator AC Motor



SR-ACLG 700/-



SR-ACLGS 700/-



SR-ACSS 700/-



SR-ACSSIT 700/-



SR-ACGD 750/-



SR-ACWP 750/-



SR-ACWP-WS 800/-

Temperature Meter



Temperature Meter (with on-off Switch)
Temp. Range-50°C ~ +80°C)

SR-1S 375/-



Temperature Meter
Temp. Range-50°C ~ +300°C

SR-1W 600/-



Temperature Meter
Temp. Range-50°C ~ +300°C

SR-2S 1100/-



Leak Detector
SR-LD2000 3400/-



Clamp Meter
SR-DT266 800/-



Clamp Meter
SR-DT203 2000/-

Refrigerant Electronic Scale

1. Full numeric keypad for fast operation
2. Charge/Recover alarm, When the warning value is reached.
3. Equipped with Solenoid valve, fully automatic control, more precise charging/recovering.
4. Valve with back hook design, easy to use.
5. The valve can be independently opened or closed to discharge air.



Capacity - 100 kg
RCS-220V 18500/-

Thermostat



DEEP FREEZER
WITH KNOB & PLATE
325/-



BOTTLE COOLER
WITH KNOB & PLATE
325/-



WATER COOLER
WITH KNOB & PLATE
325/-



RAD-GEL 325/-



RAD-SS 325/-

Airconditioner Service Valve

AC Service Valve
Straight Type



SIZE	MRP ₹ (STRAIGHT)	MRP ₹ (L-TYPE)
1/4"	315.00	340.00
3/8"	525.00	575.00
1/2"	600.00	650.00
5/8"	850.00	950.00
3/4"	1250.00	
7/8"	1750.00	



AC Service Valve
Valve (L-Type)

Can Tap Valve



Can Valve
SR-337A 400/-



Can Valve
SR-339A 400/-



Can Valve
SR-340A 475/-



Can Valve
For Hydrocarbon Can
SR-337 240/-



Can Valve
For R-134A Can
SR-339 240/-



Can Valve
SR-340 275/-



Can Valve
SR-3 315/-

Valve



Control Valve
SR -CV014 (1/4x1/4) 450/-
SR -CV516 (1/4x5/16) 450/-



Control Valve-Premium
SR-CV014P (1/4x1/4) 565/-
SR-CV516P (1/4x5/16) 565/-



Ball Valve
SR- BV014 (1/4x1/4) 440/-
SR- BV516 (1/4x5/16) 440/-



Cylinder Valve
SR-CLV014 325/-

Three Way Valve
With Sight Glass



SR-466P 910/-

Three Way Valve
Heavy Duty
Brass Body



SR-466N 700/-

Three Way Valve
High Quality
Brass Body



SR-466 375/-

Access Valve
1/4x0.40mmX100mm
(Blister Pack of 5 Pcs)



SR-110 425/-

Access Valve
Premium
1/4x0.35mmX90mm



SR-105 70/-

Controls

Vibration Absorber



MODEL	SIZE	MRP ₹
VA038	3/8	1125.00
VA012	1/2"	1150.00
VA058	5/8"	1325.00
VA034	3/4"	1550.00
VA078	7/8"	1850.00
VA118	1-1/8"	2450.00
VA138	1-3/8"	3400.00
VA158	1-5/8"	4900.00
VA218	2-1/8"	6825.00
VA258	2-5/8"	18000.00
VA318	3-1/8"	27000.00
VA358	3-5/8"	46000.00

			With Charging Port		
MODEL	SIZE	MRP ₹	MODEL	SIZE	MRP ₹
BLR/BV10	3/8"	1625.00	BLR/BV10A	3/8"	1850.00
BLR/BV12	1/2"	1700.00	BLR/BV12A	1/2"	1900.00
BLR/BV16	5/8"	1850.00	BLR/BV16A	5/8"	2250.00
BLR/BV18	3/4"	2650.00	BLR/BV18A	3/4"	3050.00
BLR/BV22	7/8"	3050.00	BLR/BV22A	7/8"	3150.00
BLR/BV28	1-1/8"	4675.00	BLR/BV28A	1-1/8"	5450.00
BLR/BV35	1-3/8"	7080.00	BLR/BV35A	1-3/8"	8100.00
BLR/BV42	1-5/8"	7600.00	BLR/BV42A	1-5/8"	9000.00

Ball Valve



Expansion Valve



MODEL	REFRIGERANT	MRP ₹
BLR/TI-HC	R22	2700.00
BLR/TIE-HC	R22	3500.00
BLR/TI-MC	R134	2500.00
BLR/TIE-MC	R134	2700.00
BLR/TI-SC	R404	2500.00
BLR/TIE-SC	R404	2700.00
ORIFICE (No. 0 - No. 6)		750.00

Sight Glass



Solder Model		Flare Model	
MODEL	MRP ₹	MODEL	MRP ₹
SGS 1/4 ODF	675.00	SGF 1/4 SAE	675.00
SGS 3/8 ODF	950.00	SGF 3/8 SAE	950.00
SGS 1/2 ODF	1000.00	SGF 1/2 SAE	1000.00
SGS 5/8 ODF	1100.00	SGF5/8 SAE	1100.00



Controls

Hand Shut Off Valve (With Flare Nuts)



Flare Model		
MODEL	SIZE	MRP ₹
SR 6210/2	1/4 SAE	750.00
SR 6210/3	3/8 SAE	850.00
SR 6210/4	1/2 SAE	1600.00
SR 6210/5	5/8 SAE	1800.00
SR 6210/6	3/4 SAE	2000.00

Solder Model		
MODEL	SIZE	MRP ₹
SR 6228/2	1/4 ODF	750.00
SR 6228/3	3/8 ODF	850.00
SR 6228/4	1/2 ODF	1600.00

Flare Model

MODEL	SIZE	MRP ₹
SR-1020/2	1/4"	2200.00
SR-1020/3	3/8"	2275.00
SR-1064/4	1/2"	2775.00
SR-1070/5	5/8"	3700.00

Solder Model

MODEL	SIZE	MRP ₹
SR-1028/2 ODF	1/4"	2200.00
SR-1028/3 ODF	3/8"	2300.00
SR-1068/4 ODF	1/2"	3000.00
SR-1078/5 ODF	5/8"	4300.00

Solenoid Valve Coil

Coil SVC-220	8W	900.00
--------------	----	--------

Solenoid Valve With 8w Coil



Pressure Control Switch



Manual Reset
DPC-600 HM 2400/-



(Auto Reset)
DPC-606 2400/-



Water Flow Switch
SR-LKB01 1800/-

Pressure Switch

HP-500/450W
HP-500/400W
HP-400/300W
HP-400/240W
HP-350/250W
HP-250/200W
HP-250/180W
HP-600/550W R410A
HP-500/450W R410A



Pressure Switch 650/-

LP-25/80W
LP-35/50W
LP-35/55W
LP-45/60W
LP-80/100W R410A

HP-500/450CP
HP-500/400CP
HP-400/300CP
HP-400/240CP
HP-350/250CP
HP-250/200CP
HP-250/180CP
HP-600/550CP R410A
HP-500/450CP R410A




Pressure Switch 650/-

LP-25/80CP
LP-35/50CP
LP-35/55CP
LP-45/60CP
LP-80/100CP R410A

Washing Machine Gear Box



OND
SR-001 575/-



GL (O)
SR-002 575/-



VC 400T
SR-003 575/-



SR-004 575/-



PAN
SR-006 575/-



55BT
SR-007 575/-



SS
SR-008 575/-



GD (O)
SR-009 575/-



HAI
SR-011 575/-



VCM 6800
SR-012 375/-



GD 6201
SR-013 575/-



WP 801
SR-016 575/-

Washing Machine Gear Box



TCL/MAH
SR-017 575/-



KEN
SR-018 575/-



GL (N)
SR-021 700/-



WP (SS)
SR-022 700/-



WP (LS)
SR-023 750/-



VC 6000
SR-024 575/-



WP 601
SR-025 575/-



VC 6800V
SR-026 600/-



SR-027 575/-



LOY (SS)
SR-031 575/-



SR-033 575/-



SR-040 575/-



MULTI
SR-041 575/-



SR-042 575/-



SR-050 575/-

Washing Machine Motor

Wash Motor



WASH MOTOR
 SR-WP-120 1700/- (AI)
 SR-WP-120 1950/- (WP)
 SR-WP-135 2600/- (CU)



WASH MOTOR
 SR-VC120 1700/- (AI)
 SR-VC120 1950/- (WP)
 SR-VC135 2600/- (CU)



WASH MOTOR
 SR-TS120 1700/- (AI)
 SR-TS120 1950/- (WP)
 SR-TS135 2600/- (CU)



WASH MOTOR
 SR-SS120 1700/- (AI)
 SR-SS120 1950/- (WP)
 SR-SS135 2600/- (CU)



WASH MOTOR
 SR-GL120 1700/- (AI)
 SR-GL120 1950/- (WP)
 SR-GL135 2600/- (CU)

Spin Motor



SPIN MOTOR
 SR-UNI70 1400/- (AI)
 SR-UNI70 1650/- (WP)
 SR-UNI70 2200/- (CU)



SPIN MOTOR
 SR-GL70 1400/- (AI)
 SR-GL70 1650/- (WP)
 SR-GL70 2200/- (CU)



SPIN MOTOR
 SR-SS70 1400/- (AI)
 SR-SS70 1650/- (WP)
 SR-SS70 2200/- (CU)



SPIN MOTOR
 SR-WPN-70 1400/- (AI)
 SR-WPN-70 1750/- (WP)
 SR-WPN-70 2250/- (CU)



SPIN MOTOR
 SR-WPO70 1400/- (AI)
 SR-WPO70 1750/- (WP)
 SR-WPO70 2250/- (CU)



SPIN MOTOR
 SR-VC70 1400/- (AI)
 SR-VC70 1750/- (WP)
 SR-VC70 2250/- (CU)

Washing Machine Timer



GL 15 MIN SINGLE



VC 15 MIN SINGLE



WP 3 WIRE 15 MIN SINGLE



OND 7 WIRE 15 MIN SINGLE



WP 4 WIRE 15 MIN SINGLE



VC 35 MIN SINGLE



GL NEW SPIN



GL SPIN



GD SPIN



WP SPIN



INT SPIN



SS SPIN



GL 15 MIN DOUBLE



VC 15 MIN DOUBLE



SS 15 MIN DOUBLE



SYMBOL REPAIR NETWORK LLP

B-12, Sector-88, Noida-201305 Uttar Pradesh, India

Email: ajay@symbolrefair.co.in

Website: www.symbolrefair.co.in

Ph.: 0120-3613042, Mobile: + 91 9891040575